

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

Item n° :

Customer pos. no.:

500124520

Model :

2 K 35/40 T

Pump data

MEI ≥ --

Product version

Versione con serbatoi

Pressure rating :

PN 10

Min. fluid temperature :

Max. fluid temperature :

Max. Ambient temperature :

Requested data

Flow :

Head :

Fluid :

Water

Fluid Temperature :

20 °C

Density :

998,3 kg/m³

Kinematic viscosity :

1,005 mm²/s

Vapor pressure :

0,34 psi

Hydraulic data (duty point)

Flow :

Head :

Motor data main pump:

Brand:

DAB

Nominal power P2 :

0,75 kW

Rated speed :

2.850 1/min

Rated voltage :

3~ 230 V

50 Hz

Nominal current :

3,8 A



Degree of protection :

IP 44

Dimensions in mm

A	750		
B	540		
C	500		
D	555		
DNA	2"		
DNM	1"1/2		
E	425		
H	905		
H1	457		
H2	150		

Curve tolerance according to ISO 9906

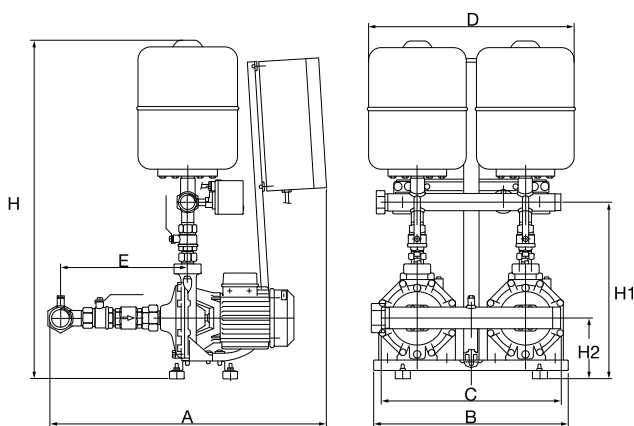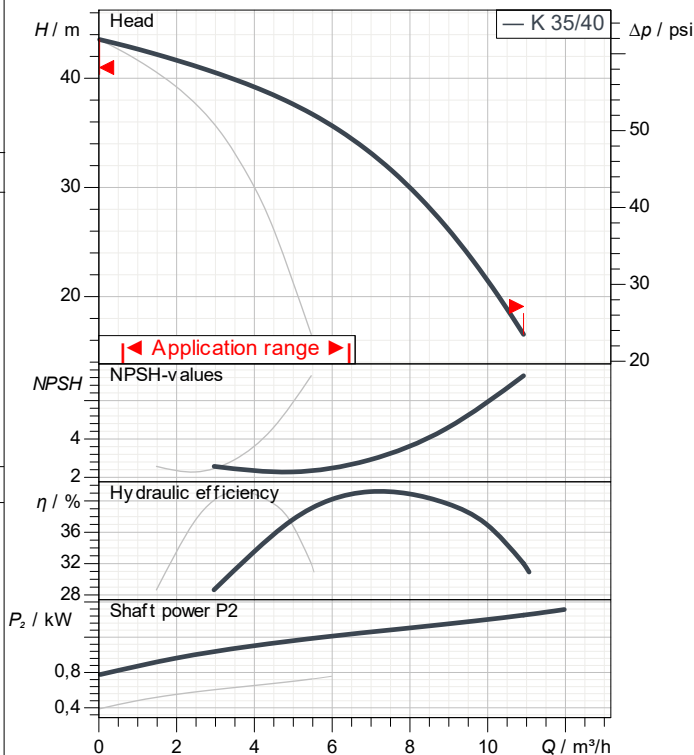

Weight : 73 kg

Pump connection

Suction side : 2" / PN 10

Discharge side : 1" 1/2 / PN 10


Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

2 K 35/40 T

Curve tolerance according to ISO 9906

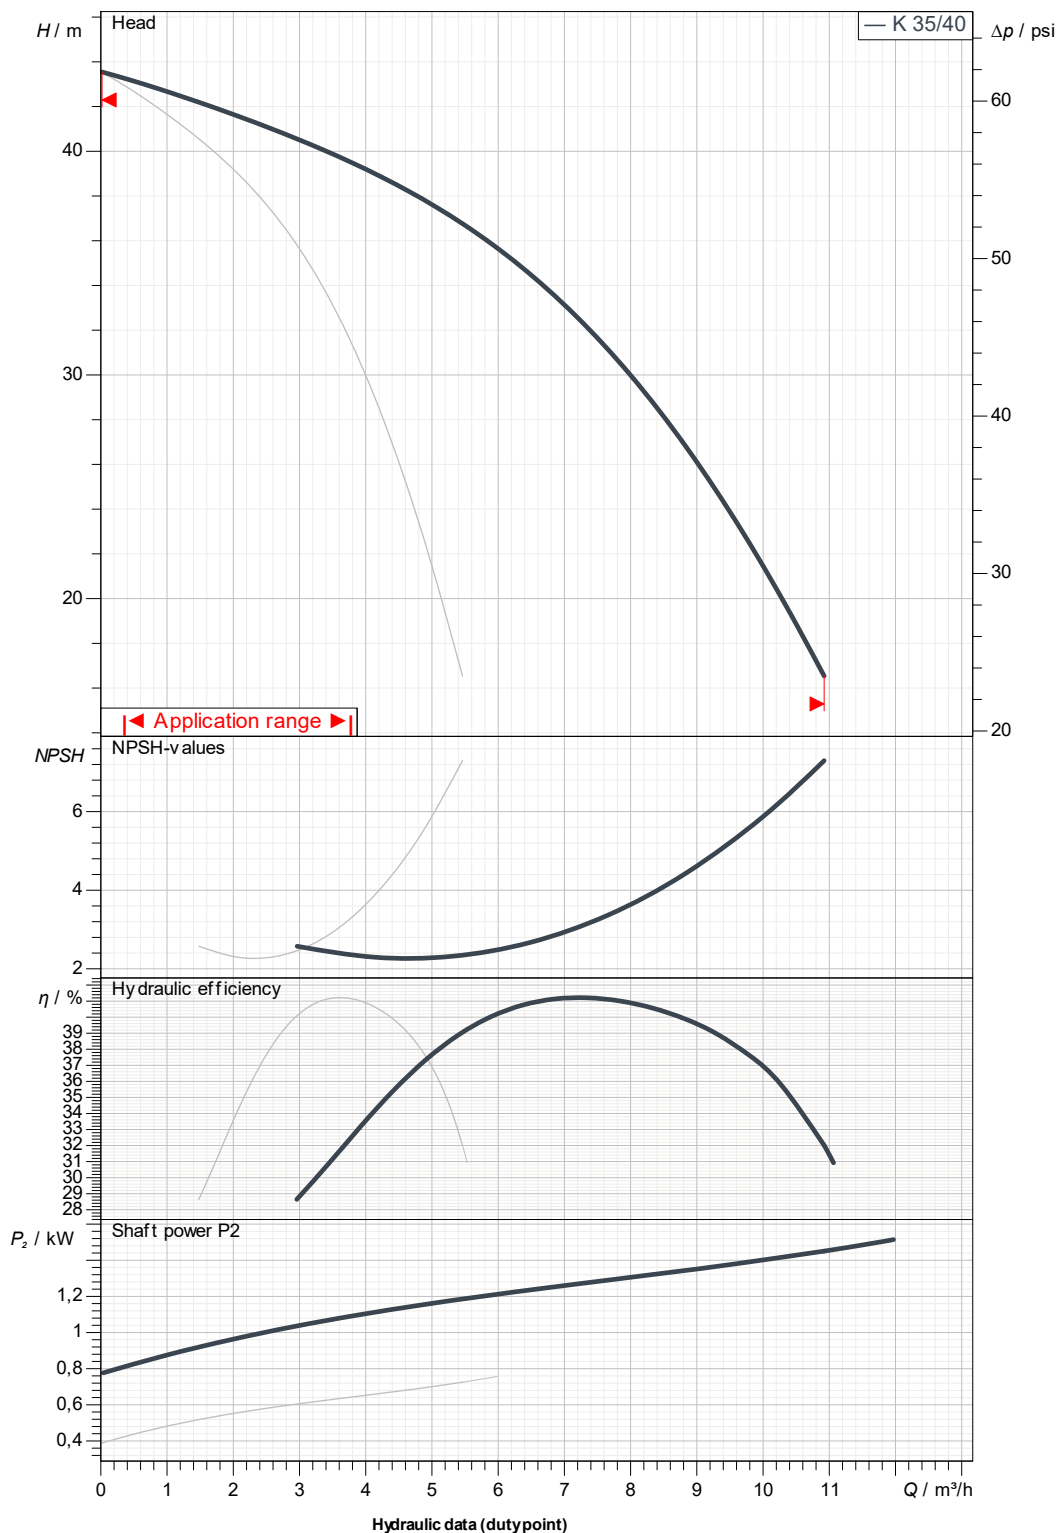

Suction side :
2"
145 psi

Discharge side :
1" 1/2
145 psi

Flow :

Head :

Rated speed :
2.850 1/min

Project

Project ID

Created by

Created on

20/09/24



DIMENSIONAL DRAWING

20/09/24

Page 3 / 3


DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

2 K 35/40 T

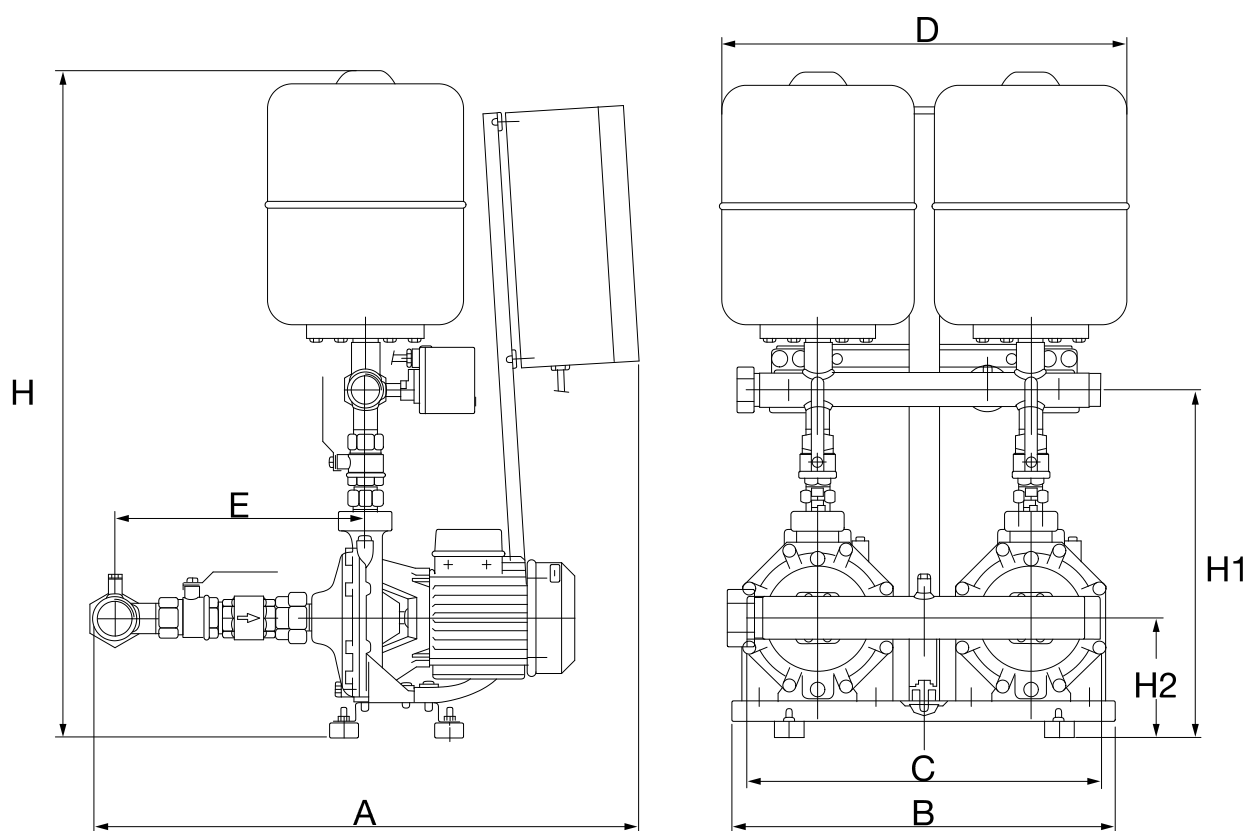

Dimensions in mm

Pump connection

1	A	750					
2	B	540					
3	C	500					
4	D	555					
5	DNA	2"					
6	DNM	1"1/2					
7	E	425					
8	H	905					
9	H1	457					
10	H2	150					
11							

Suction

2"

145 psi

Discharge

1" 1/2

145 psi

Project

Project ID

Created by

Created on

20/09/24