

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

Item n° :

Customer pos. no.:

500124640

Model :

2 K 66/100 T

Pump data

MEI ≥ --

Product version Versione con serbatoi

Pressure rating : PN 10

Min. fluid temperature : -10 °C

Max. fluid temperature : 50 °C

Max. Ambient temperature : 40 °C

Requested data

Flow :

Head :

Fluid : Water

Fluid Temperature : 20 °C

Density : 998,3 kg/m³

Kinematic viscosity : 1,005 mm²/s

Vapor pressure : 0,34 psi

Hydraulic data (duty point)

Flow :

Head :

Motor data main pump:

Brand: DAB

Nominal power P2 : 3 kW

Rated speed : 2.850 1/min

Rated voltage : 3~ 400 V 50 Hz



Nominal current : 8,4 A

Degree of protection : IP 55

Dimensions in mm

A	950		
B	580		
C	500		
D	545		
DNA	2"1/2		
DNM	2"1/2		
E	425		
H	1.120		
H1	570		
H2	220		

Curve tolerance according to ISO 9906

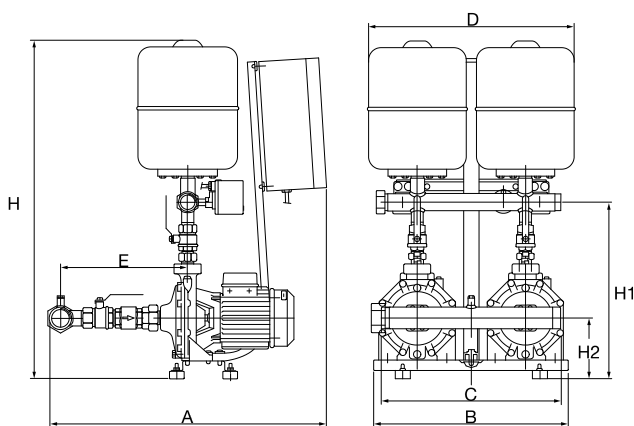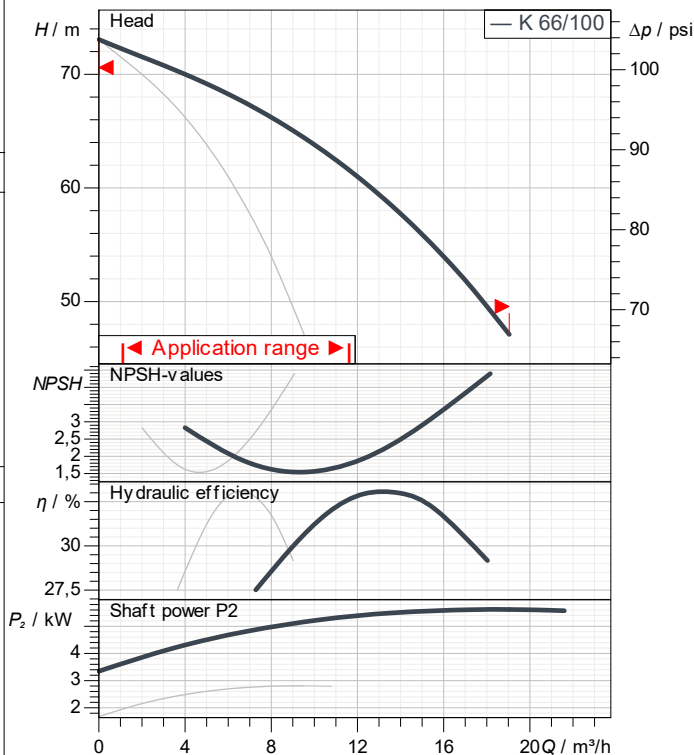

Weight : 160 kg

Pump connection

Suction side : 2" 1/2 / PN 10

Discharge side : 2" 1/2 / PN 10


Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

2 K 66/100 T

Curve tolerance according to ISO 9906

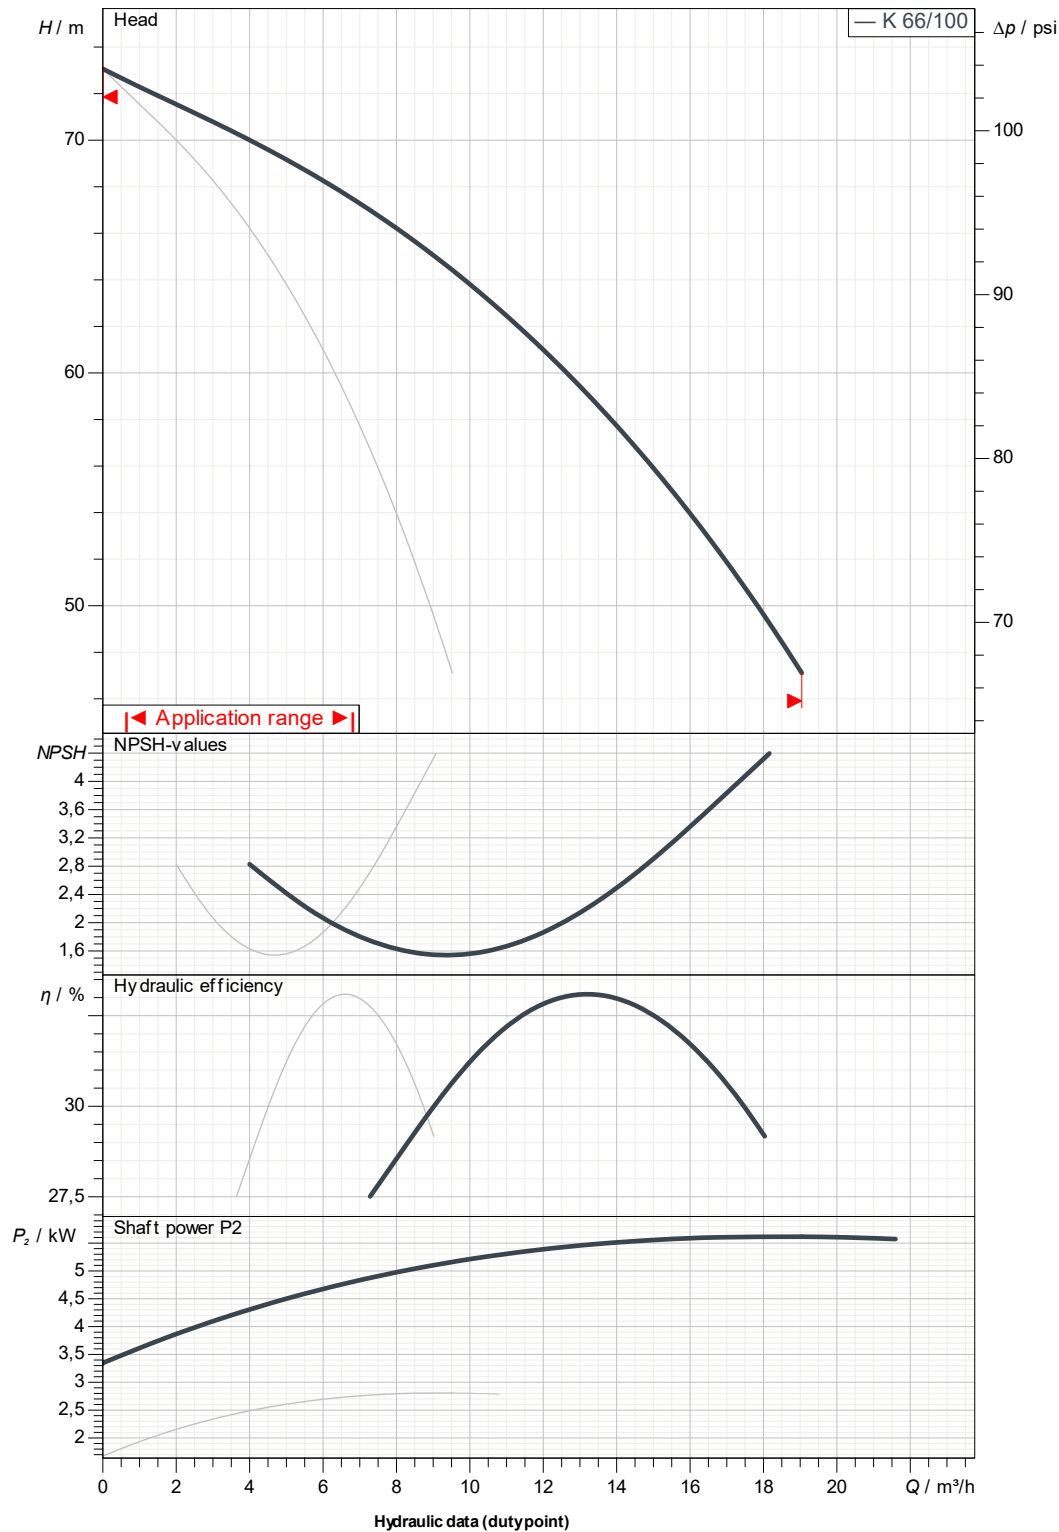

Suction side :
2" 1/2
145 psi

Discharge side :
2" 1/2
145 psi

Flow :

Head :

Rated speed :
2.850 1/min

Project

Project ID

Created by

Created on

20/09/24



DIMENSIONAL DRAWING

20/09/24

Page 3 / 3


DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

2 K 66/100 T

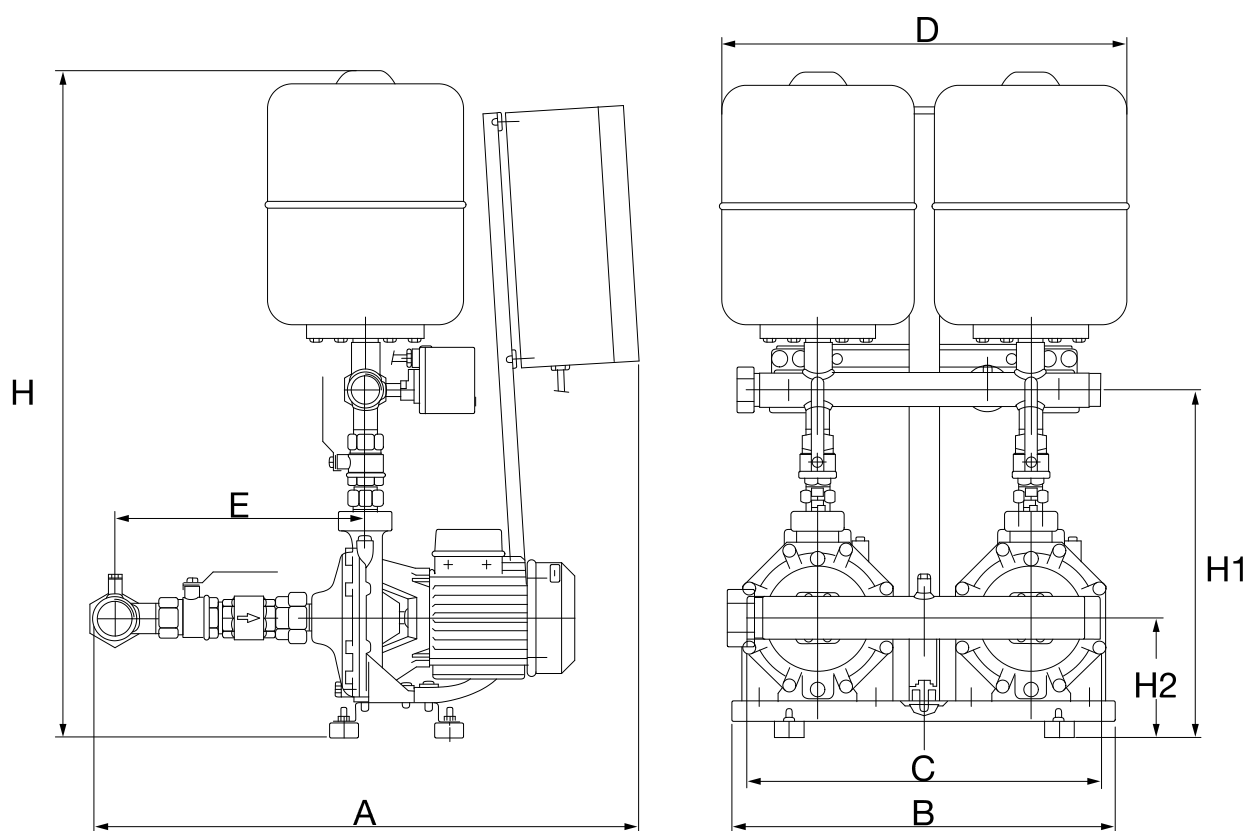

Dimensions in mm

Pump connection

1	A	950					
2	B	580					
3	C	500					
4	D	545					
5	DNA	2" 1/2					
6	DNM	2" 1/2					
7	E	425					
8	H	1.120					
9	H1	570					
10	H2	220					
11							
Project			Project ID			Created by	Created on
							20/09/24