

	Product Information LPP125-35-30/4	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2024/04/23
Project Name		Client Name	Heatinvest
		Client Addr.	
Item NO		Contacts	
		Contact	


Part NO.	LPP125-35-30/4	
Product Picture	Note	
	This series products are vertical in-line centrifugal pump. Standard configuration Mechanical seal standard motor. In daily maintenance the motor and impeller can be removed from the pump body for the maintenance and repair no need to remove pump body from the pipeline. Optimization design of impeller by CFD fluid simulation and analysis technology less axial force longer bearing life. Appearance designed by Italy professional shape design team the most advanced modular design concept. The surface of the whole machine adopts electrophoretic coating process, have better anti-corrosion effect.	

Nameplate parameters	
flow	200 m³/h
head	35 m
speed	1480 rpm
number of stages	1
Technical	
Curve tolerance	IS09906 AnnexA
Maximum lift (m)	40
Minimum usage flow (m³/ h)	20
Maximum use flow (m³/ h)	279
Material	
Impeller	QT400
Pump inlet	HT200
Pump shaft	AISI304
Mechanical seal	SiC/C
O-ring	NBR
Working conditions	
Max. ambient temperature (°C)	40
Max. liquid temperature (°C)	90
Pumped medium	Thin, clean, non corrosive, non flammable and explosive liquid without solid particles and fibers.
Working pressure	10bar&&16bar
Installation	
Inlet & Outlet Diameter	DN125
Connection standard	DIN
Motor	
Motor phase	Three phase
Protection class	IP55
Motor poles	4
Insulation class	F
Motor power (KW)	30KW
Frequency	50
Rated voltage (V)	380
Rated current (A)	56.6242849313779
Efficiency class	IE3
Power factor	0.86

	Product Information LPP125-35-30/4	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2024/04/23
Project Name		Client Name	Heatinvest
		Client Addr.	
Item NO		Contacts	
		Contact	


Drive end bearing	7312
Non-drive end bearing	6312
Efficiency (%)	93.6
Weight/Packaging	
Gross weight (kg)	460
Package size	1350*870*760
	

	Performance Curve LPP125-35-30/4	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2024/04/23
Project Name		Client Name	Heatinvest
Item NO		Client Addr.	
		Contacts	
		Contact	

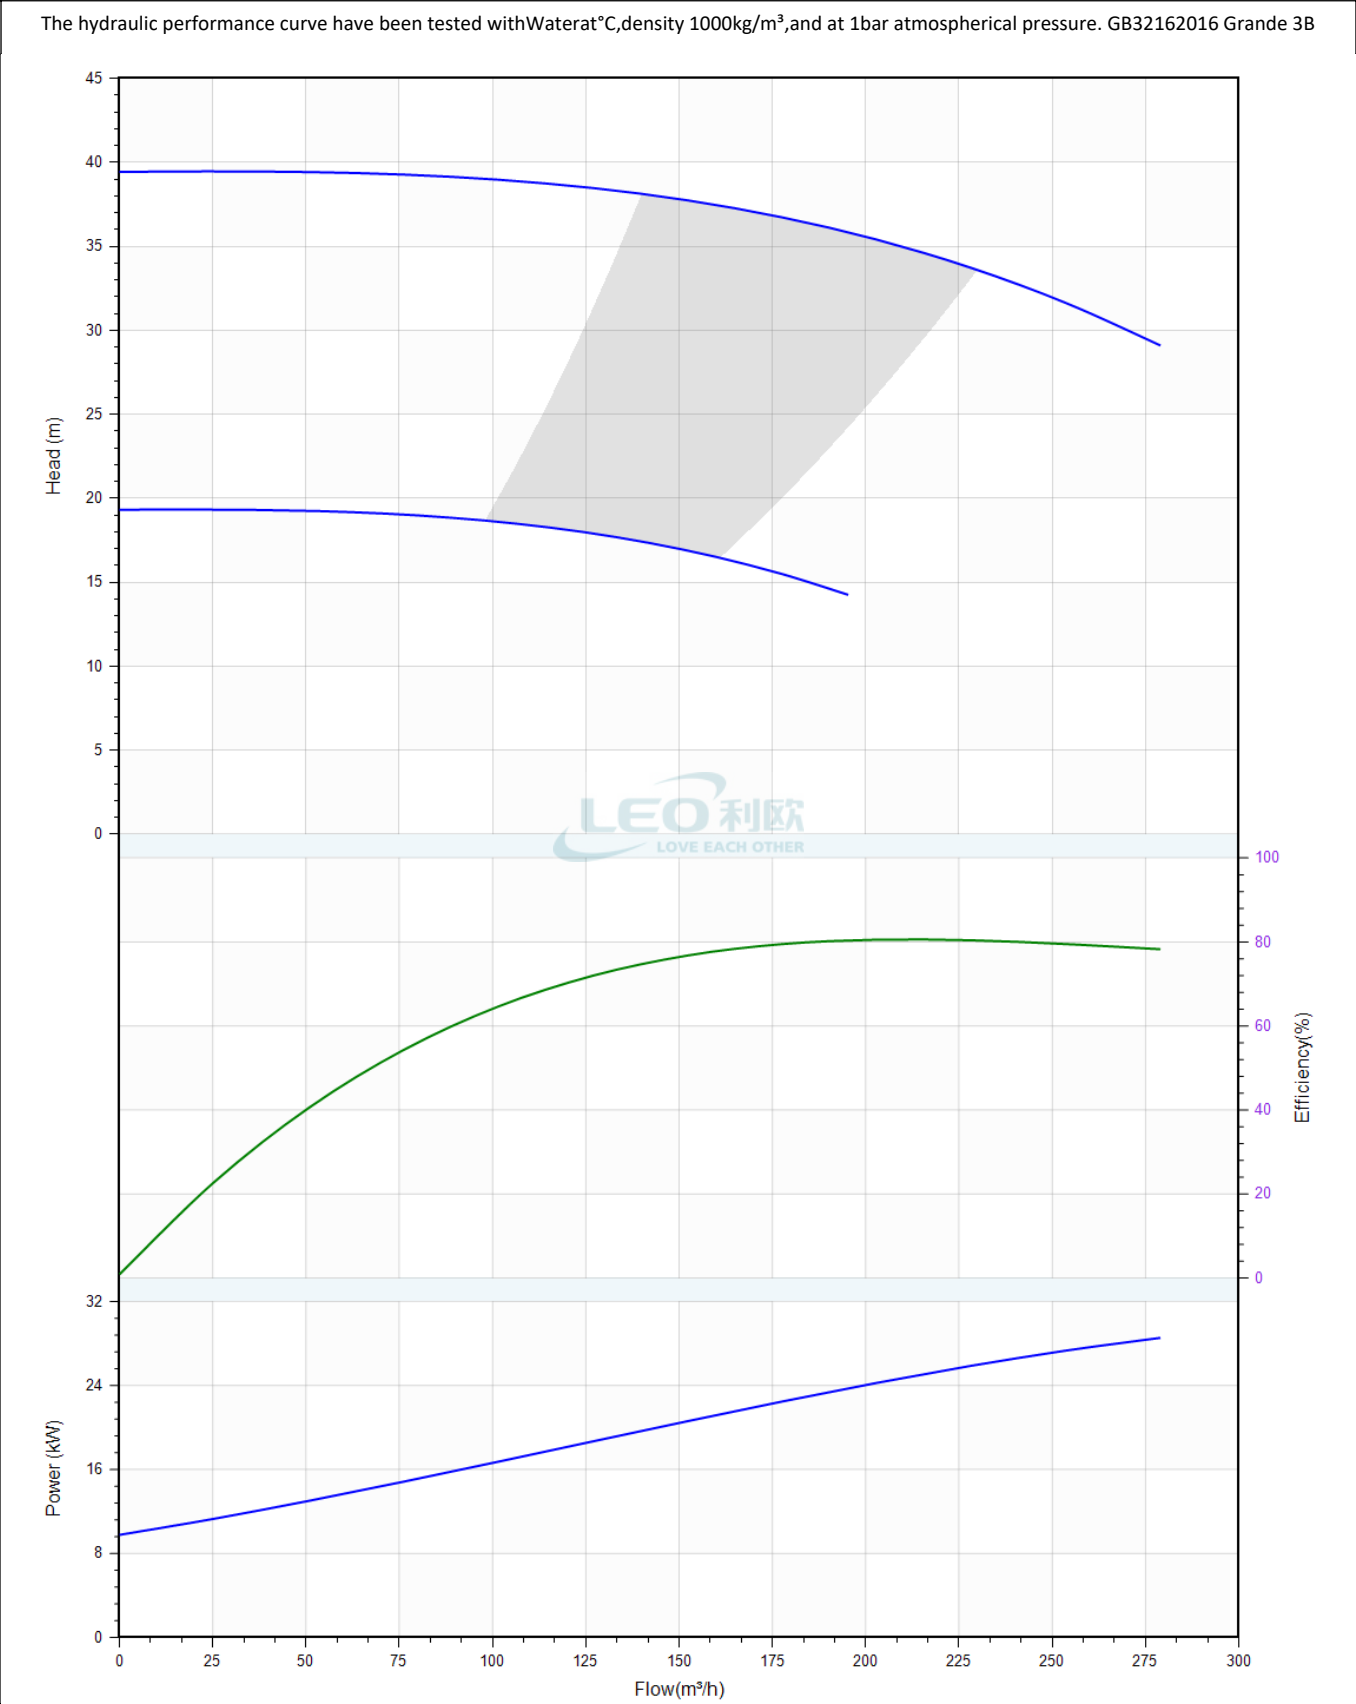

	Pump Technical Parameters LPP125-35-30/4	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2024/04/23
Project Name		Client Name	Heatinvest
		Client Addr.	
Item NO		Contacts	
		Contact	

Rated parameters	
Pump model	LPP125-35-30/4
Part NO.	LPP125-35-30/4
Rated flow	200 m³/h
Rated head	35 m
Rated efficiency (%)	80.5
Power (kW)	23.7
Speed (rpm)	1480
Max impeller diameter (mm)	340
Medium	
Pumped medium	Water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1

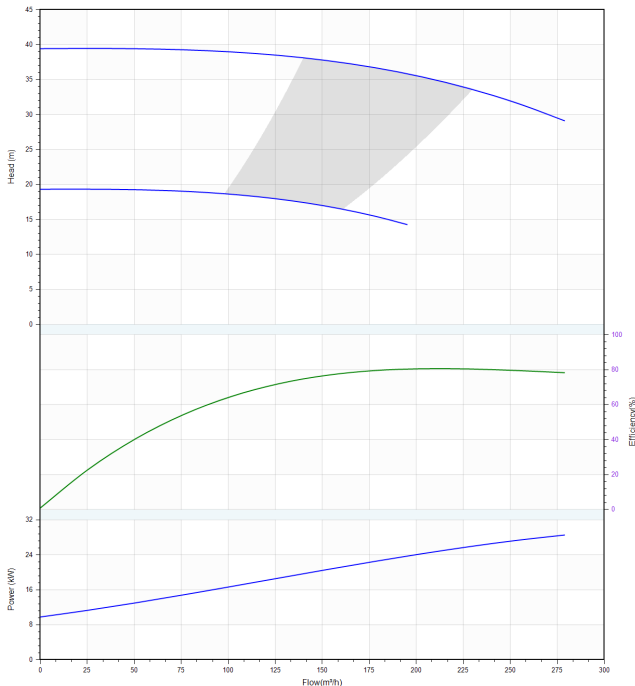


The graph displays the performance characteristics of the LPP125-35-30/4 pump. The x-axis represents Flow in m³/h, ranging from 0 to 300. The left y-axis represents Head in meters (m), ranging from 0 to 45. The right y-axis represents Efficiency in percent (%), ranging from 0 to 100. The bottom y-axis represents Power in kilowatts (kW), ranging from 0 to 32. The blue curve shows the head decreasing from approximately 40 m at 0 m³/h to 30 m at 275 m³/h. The green curve shows efficiency increasing from approximately 35% at 0 m³/h to a peak of about 85% at 200 m³/h, then slightly decreasing. The purple curve shows power increasing from approximately 8 kW at 0 m³/h to about 25 kW at 275 m³/h. A shaded gray area highlights the operating range, bounded by the head curve and the efficiency curve, starting from approximately 100 m³/h and 18 m head up to 275 m³/h and 30 m head.

Flow (m³/h)	Head (m)	Efficiency (%)	Power (kW)
0	40	35	8
50	39	55	10
100	38	75	13
150	37	85	17
200	35	85	21
250	32	82	24
275	30	80	25



	Installation picture LPP125-35-30/4	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2024/04/23
Project Name		Client Name	Heatinvest
Item NO		Client Addr.	
		Contacts	
		Contact	

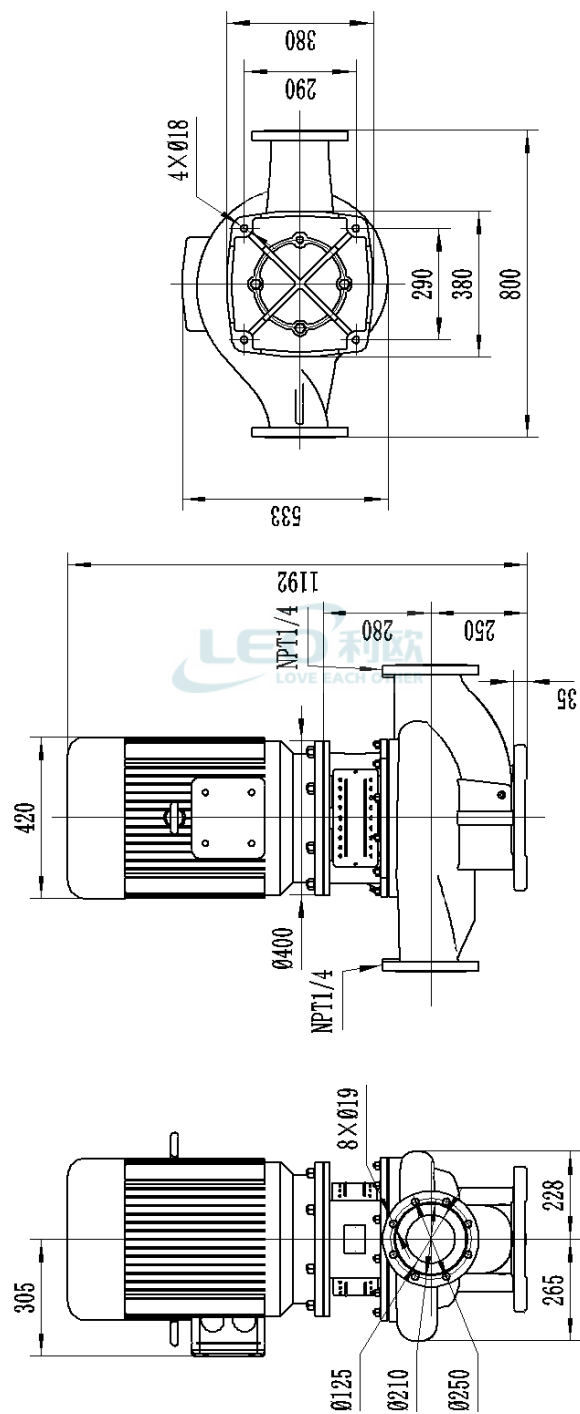

	Structure picture LPP125-35-30/4	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2024/04/23
Project Name		Client Name	Heatinvest
		Client Addr.	
Item NO		Contacts	
		Contact	

LPP



29	Hex nut	
28	Washer	
27	Motor	
26	Hex head bolt	
25	Clamp ring	45
24	Pump shaft	304/45
23	Key	304
22	Release valve	304
21	Hex nut	HPb59-1
20	Washer	
19	Hex head bolt	
18	Motor frame	HT200
17	Rivet	
16	Nameplate	
15	Guard plate	304
14	Screw	
13	Mechanical seal	SiC/C
12	Impeller	HT200
11	Washer	304
10	Spring washer	304
9	Hex nut	304
8	O-ring	NBR
7	Double-head stud A type	
6	Hexagonal socket head plug	
5	Pump body	HT200
4	Hexagonal socket head plug	
3	Baseplate	HT200
2	Spring washer	
1	Hex head bolt	
No.	Part	Material

	Physical picture LPP125-35-30/4	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2024/04/23
		Client Name	Heatinvest
Project Name		Client Addr.	
Item NO		Contacts	
		Contact	

