

	Product Information LPP65-17-3/2	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2024/04/23
Project Name		Client Name	Heatinvest
		Client Addr.	
Item NO		Contacts	
		Contact	

Part NO.	LPP65-17-3/2	
Product Picture	Note	
	This series products are vertical in-line centrifugal pump. Standard configuration Mechanical seal standard motor. In daily maintenance the motor and impeller can be removed from the pump body for the maintenance and repair no need to remove pump body from the pipeline. Optimization design of impeller by CFD fluid simulation and analysis technology less axial force longer bearing life. Appearance designed by Italy professional shape design team the most advanced modular design concept. The surface of the whole machine adopts electrophoretic coating process, have better anti-corrosion effect.	


Nameplate parameters	
flow	40 m³/h
head	17 m
speed	2900 rpm
number of stages	1
Technical	
Curve tolerance	ISO9906 AnnexA
Maximum lift (m)	20
Minimum usage flow (m³/ h)	4
Maximum use flow (m³/ h)	56
Material	
Impeller	HT200
Pump inlet	HT200
Pump shaft	AISI304
Mechanical seal	SiC/C
O-ring	NBR
Working conditions	
Max. ambient temperature (°C)	40
Max. liquid temperature (°C)	90
Pumped medium	Thin, clean, non corrosive, non flammable and explosive liquid without solid particles and fibers.
Working pressure	16bar
Installation	
Inlet & Outlet Diameter	DN65
Connection standard	DIN
Motor	
Motor phase	Three phase
Protection class	IP55
Motor poles	2
Insulation class	F
Motor power (KW)	3KW
Frequency	50
Rated voltage (V)	380
Rated current (A)	6.01505528040988
Efficiency class	IE3
Power factor	0.87

	Product Information LPP65-17-3/2	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2024/04/23
Project Name		Client Name	Heatinvest
		Client Addr.	
Item NO		Contacts	
		Contact	

Drive end bearing	6206
Non-drive end bearing	6206
Efficiency (%)	87.1
Weight/Packaging	
Gross weight (kg)	88.6
Package size	735*405*350




	Performance Curve LPP65-17-3/2	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2024/04/23
Project Name		Client Name	Heatinvest
Item NO		Client Addr.	
		Contacts	
		Contact	

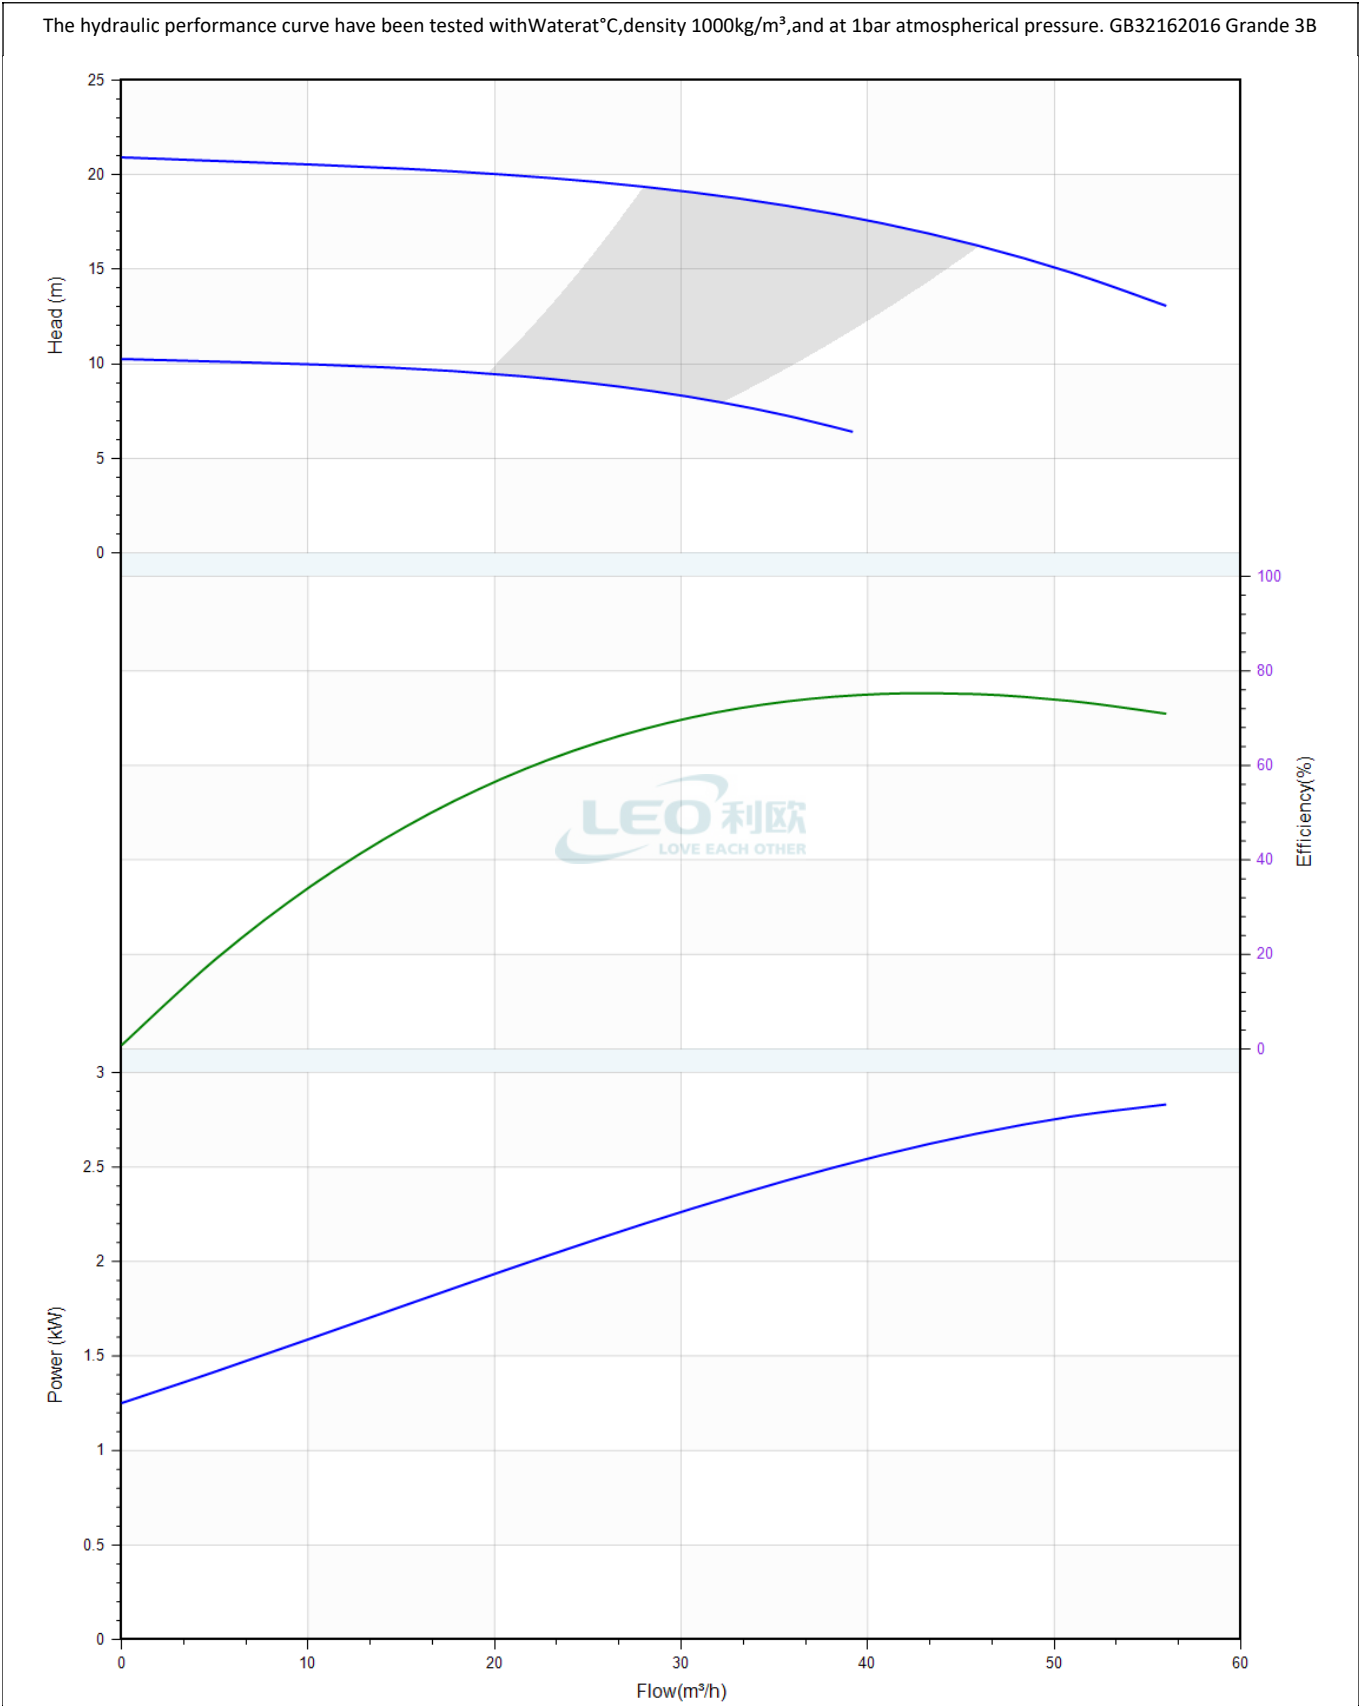


	Pump Technical Parameters LPP65-17-3/2	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2024/04/23
Project Name		Client Name	Heatinvest
		Client Addr.	
Item NO		Contacts	
		Contact	

Rated parameters	
Pump model	LPP65-17-3/2
Part NO.	LPP65-17-3/2
Rated flow	40 m³/h
Rated head	17 m
Rated efficiency (%)	76
Power (kW)	2.44
Speed (rpm)	2900
Max impeller diameter (mm)	133
Medium	
Pumped medium	Water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1

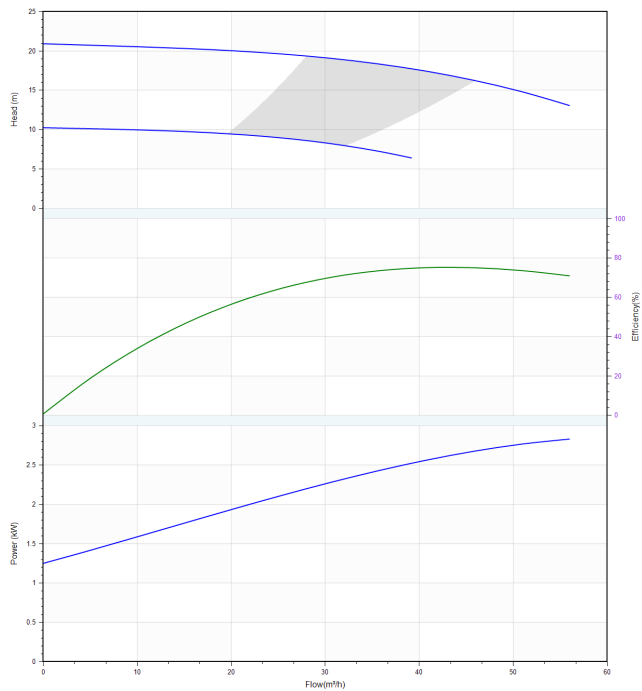

	Installation picture LPP65-17-3/2	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2024/04/23
Project Name		Client Name	Heatinvest
Item NO		Client Addr.	
		Contacts	
		Contact	

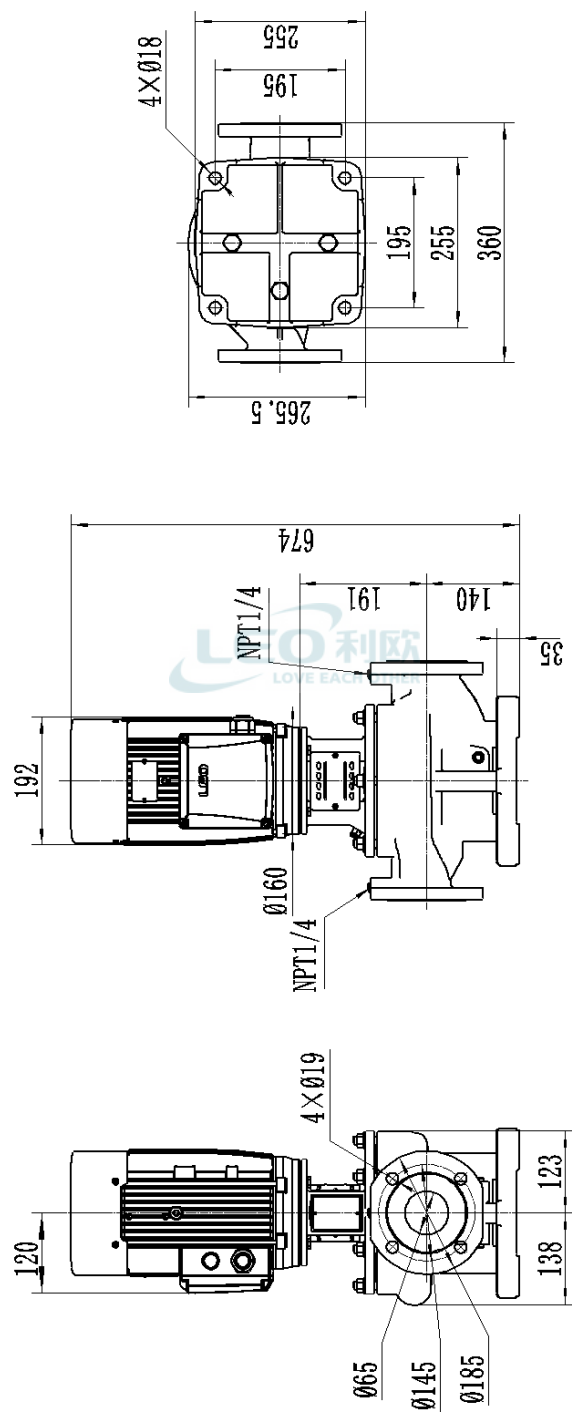

	Physical picture LPP65-17-3/2	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2024/04/23
Project Name		Client Name	Heatinvest
		Client Addr.	
Item NO		Contacts	
		Contact	

