

Receiver
From

Company
Reference
Address
Phone
Fax
E-mail

Item n° :

103040120H

Customer pos. no.:
Model :

FEKA VS 1200 M - A

Pump data

Free passage : 50 mm

Pressure rating :

Min. fluid temperature : 0

Max. fluid temperature : 50 °C

Max. Ambient temperature : 40 °C

Requested data

Flow :

Head :

Fluid : Water

Fluid Temperature : 20 °C

Density : 998,3 kg/m³

Kinematic viscosity : 1,005 mm²/s

Vapor pressure : 0,00234 MPa

Hydraulic data (duty point)

Flow :

Head :

Materials

Pump body Stainless Steel (AISI 304)

Impeller Stainless Steel (AISI 304)



Motor shaft AISI 316

Seal disk Stainless Steel (AISI 304)

Motor casing Stainless Steel (AISI 304)

Mechanical seal pump side Silicon carbide/Silicon carbide

Mechanical seal motor side Carbon/Alumina

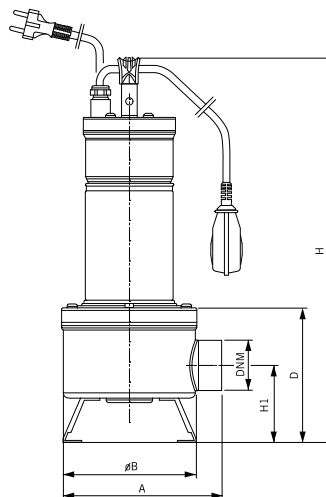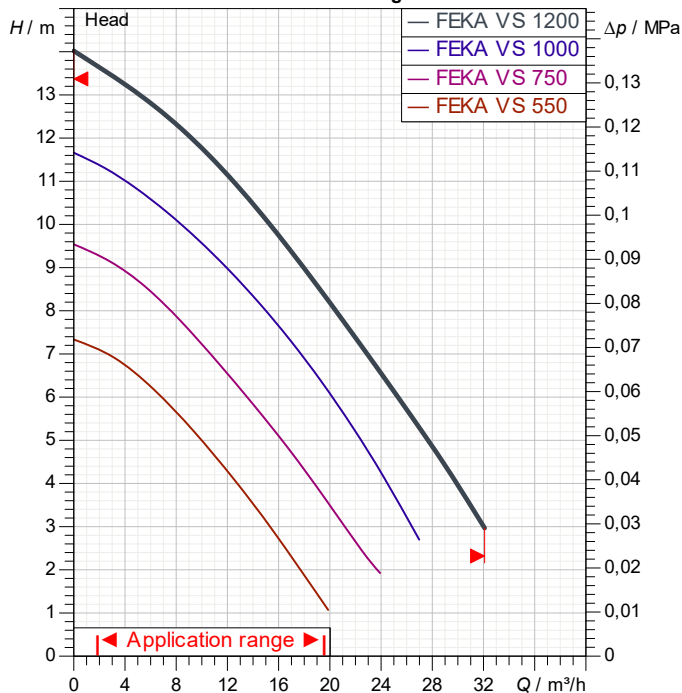Curve tolerance according to ISO 9906

Motor data

Motor brand : DAB

Nominal power P2 : 1,2 kW

Rated speed : 2.800 1/min

Rated voltage : 1~ 220-240 V

Nominal current : 8,63 A

Degree of protection : IP 68

50 Hz

Weight :

20,8 kg

Dimensions in
mm

A 203
B 170
D 172
DNM 2" F
H 537
H1 98

Pump connection

Suction side :

/

Discharge side :

2" GAS

/ --


Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

FEKA VS 1200 M - A

Curve tolerance according to ISO 9906

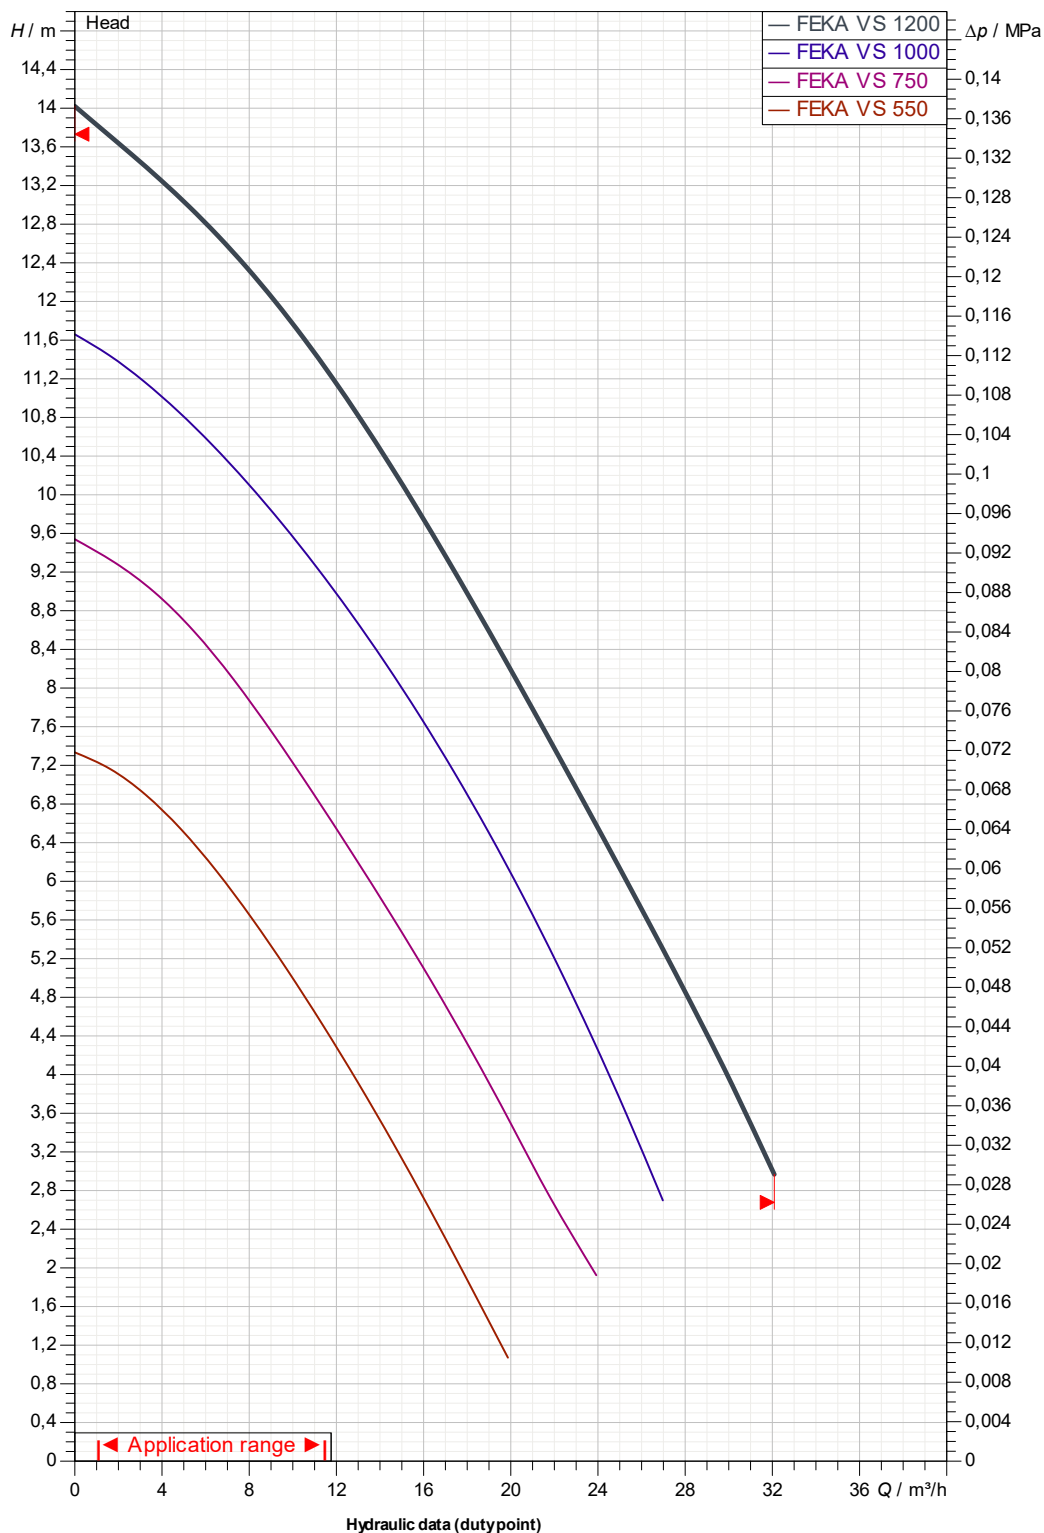

Suction side :

Discharge side :
2" GAS
--

Flow :

Head :

Rated speed :
2.800 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

26/11/24



DIMENSIONAL DRAWING

26/11/24

Page 3 / 3


DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

FEKA VS 1200 M - A

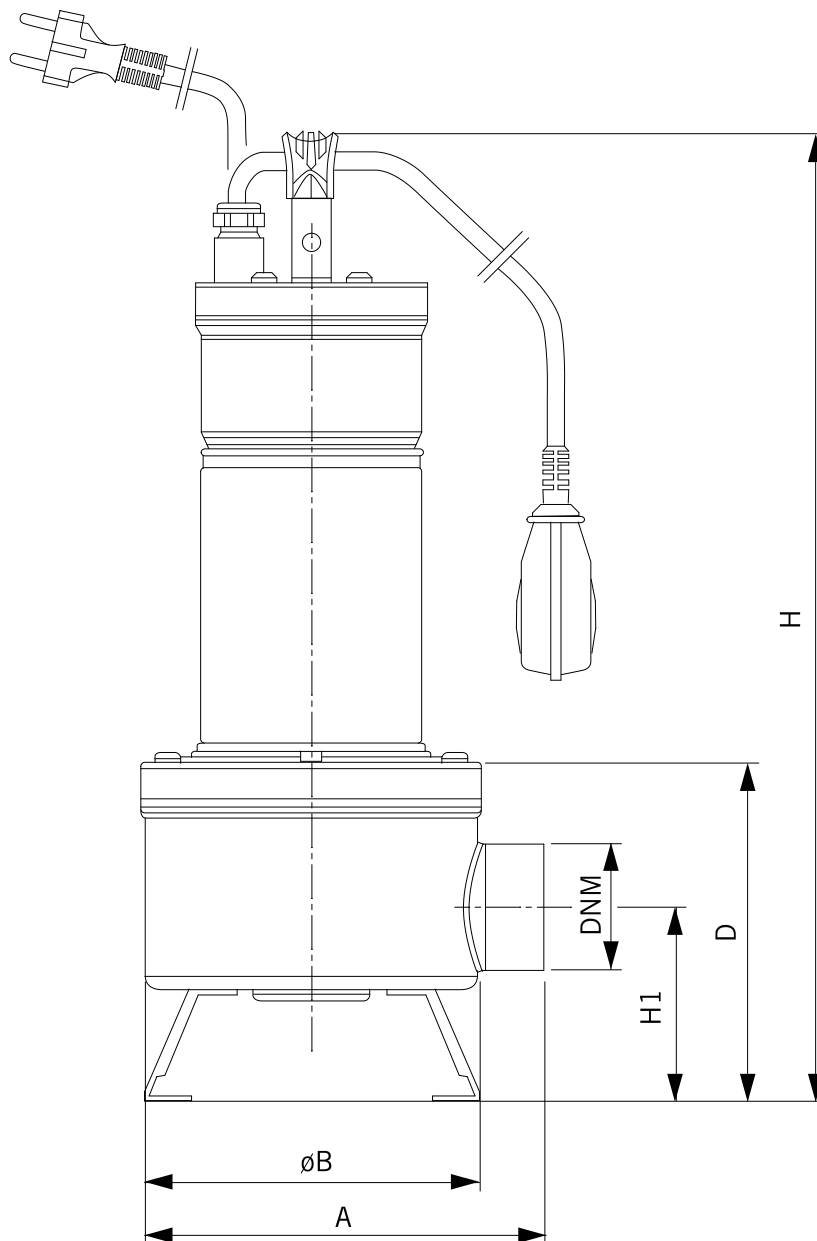

Dimensions in mm

Pump connection

1	A	203								
2	B	170								
3	D	172								
4	DNM	2" F								
5	H	537								
6	H1	98								
7										
8										
9										
10										
11										
MAIN_PROJECT_TITLE			BUSINESS_PROCESS_ID			OWNER_		ISSUE_DATE		
								26/11/24		