

	Product Information LPP150-25-22/4	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/10/26
Project Name		Client Name	Spaceport
		Client Addr.	Куйбышева 95 Б
Item NO		Contacts	
		Contact	


Part NO.	LPP150-25-22/4		
Product Picture		Note	
		This series products are vertical in-line centrifugal pump. Standard configuration Mechanical sealstandard motor. In daily maintenance the motor and impeller can be removed from the pump body for the maintenance and repairno need to remove pump body from the pipeline. Optimization design of impeller by CFD fluid simulation and analysis technologyless axial forcelonger bearing life. Appearance designed by Italy professional shape design teamthe most advanced modular design concept. The surface of the whole machine adopts electrophoretic coating process, have better anti-corrosion effect.	
Nameplate parameters			
flow	200 m³/h		
head	25 m		
speed	1480 rpm		
number of stages	1		
Technical			
Curve tolerance	IS09906 AnnexA		
Maximum lift (m)	28		
Minimum usage flow (m³/ h)	20		
Maximum use flow (m³/ h)	260		
Material			
Impeller	HT200		
Pump inlet	HT200		
Pump shaft	AISI304		
Mechanical seal	SiC/C		
O-ring	NBR		
Working conditions			
Max. ambient temperature (°C)	40		
Max. liquid temperature (°C)	90		
Pumped medium	Thin, clean, non corrosive, non flammable and explosive liquid without solid particles and fibers.		
Working pressure	10bar&&16bar		
Installation			
Inlet & Outlet Diameter	DN150		
Connection standard	DIN		
Motor			
Motor phase	Three phase		
Protection class	IP55		
Motor poles	4		
Insulation class	F		
Motor power (KW)	22KW		
Frequency	50		
Rated voltage (V)	380		
Rated current (A)	41.7923754590299		
Efficiency class	IE3		
Power factor	0.86		

	Product Information LPP150-25-22/4	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/10/26
Project Name		Client Name	Spaceport
		Client Addr.	Куйбышева 95 Б
Item NO		Contacts	
		Contact	

Drive end bearing	7311
Non-drive end bearing	6311
Efficiency (%)	93
Weight/Packaging	
Gross weight (kg)	422
Package size	1350*870*760




	Performance Curve LPP150-25-22/4	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/10/26
Project Name		Client Name	Spaceport
Item NO		Client Addr.	Куйбышева 95 Б
		Contacts	
		Contact	

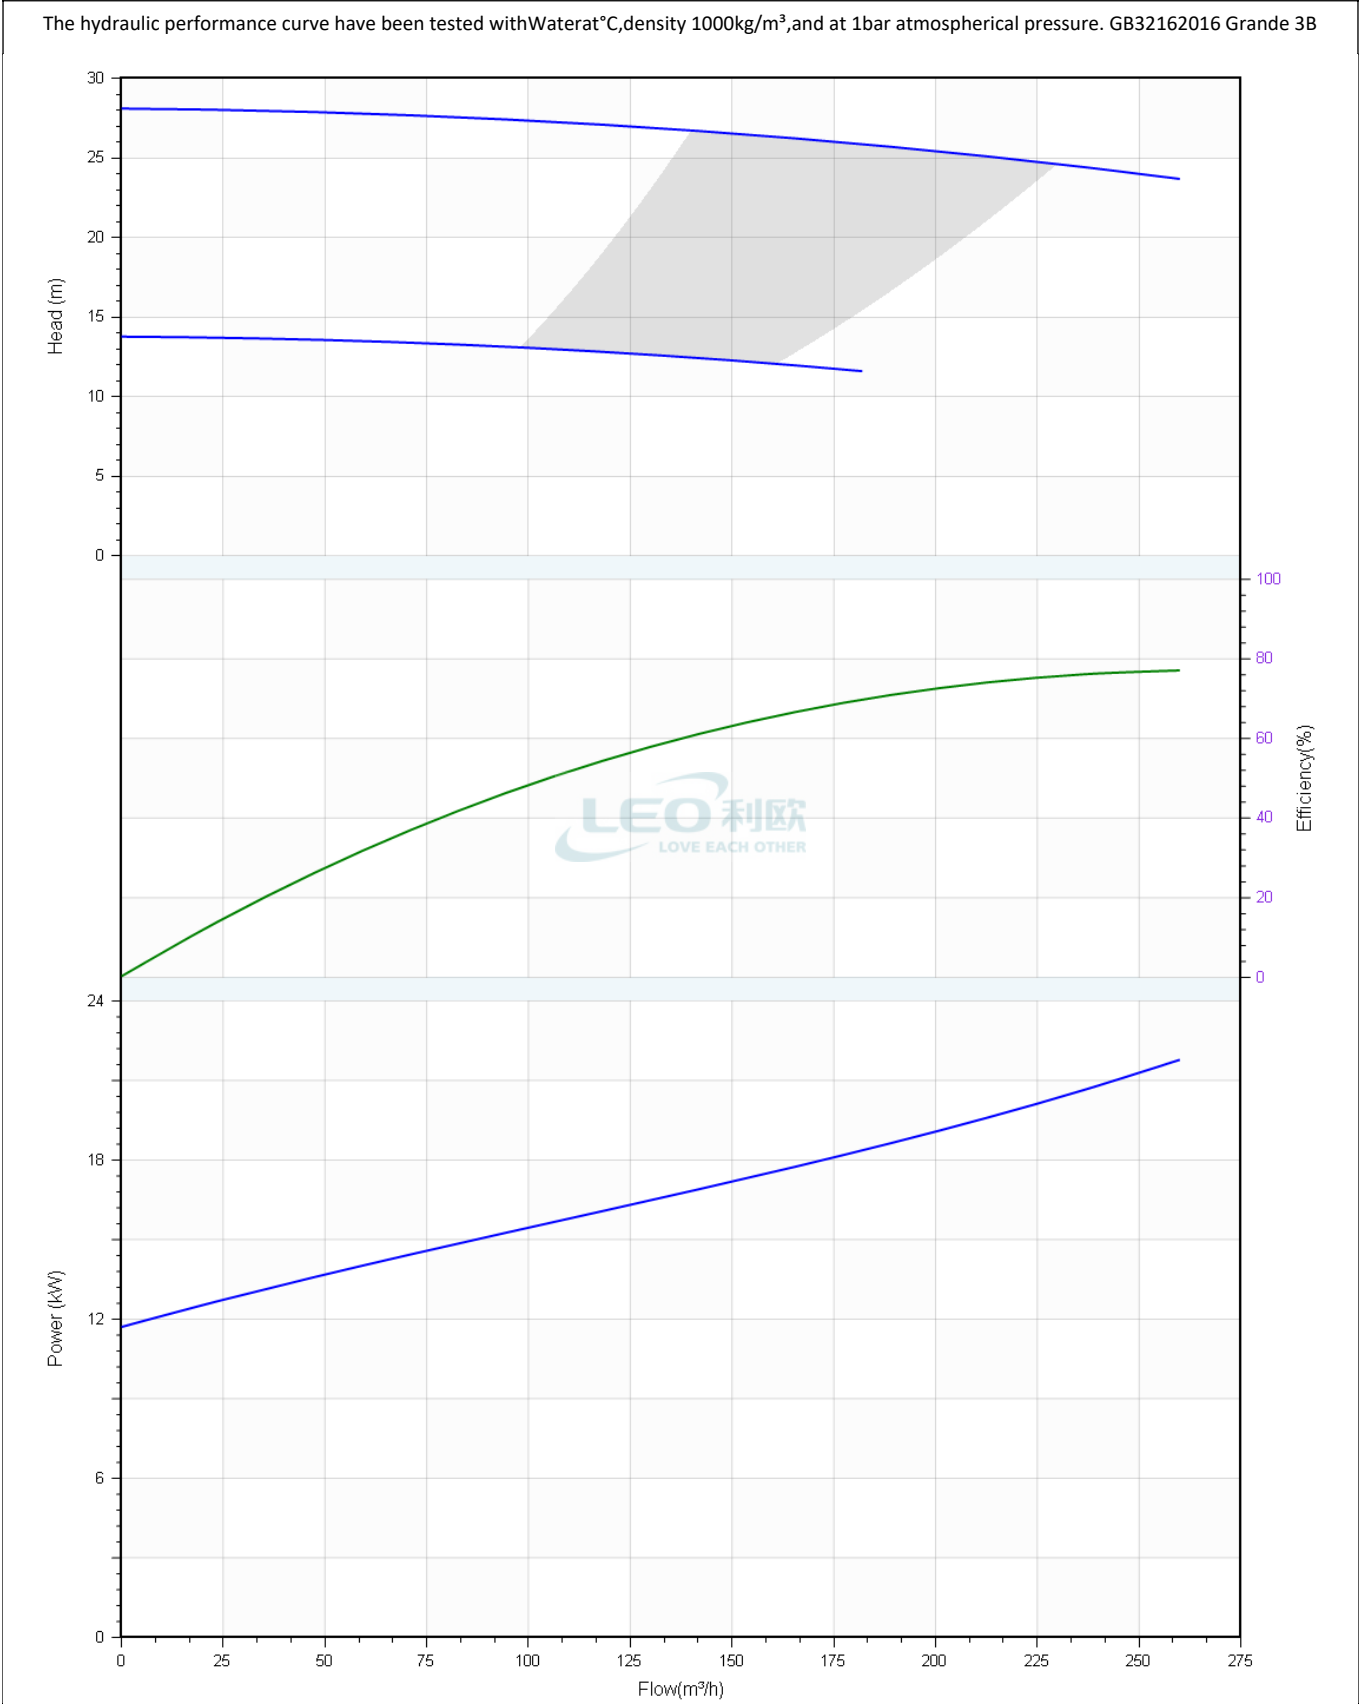

	Pump Technical Parameters LPP150-25-22/4	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/10/26
Project Name		Client Name	Spaceport
		Client Addr.	Куйбышева 95 Б
Item NO		Contacts	
		Contact	

Rated parameters	
Pump model	LPP150-25-22/4
Part NO.	LPP150-25-22/4
Rated flow	200 m³/h
Rated head	25 m
Rated efficiency (%)	73
Power (kW)	18.7
Speed (rpm)	1480
Max impeller diameter (mm)	288
Medium	
Pumped medium	Water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1

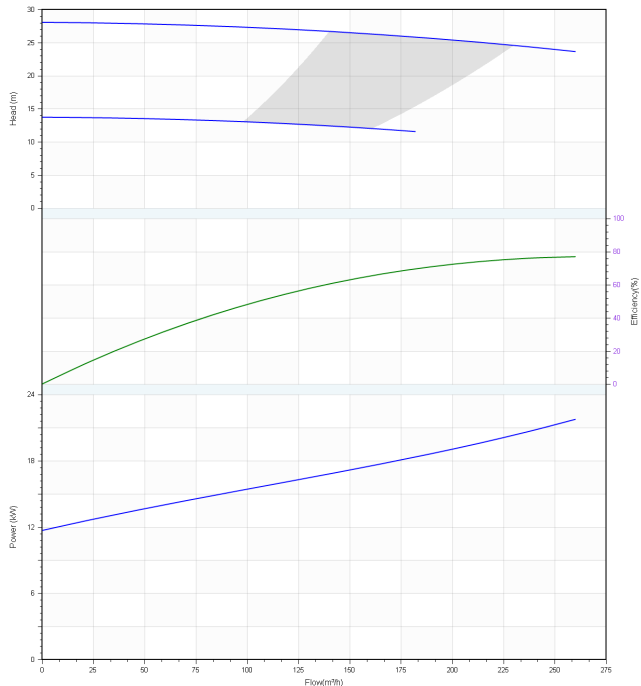


The graph displays three performance metrics against flow rate (m³/h) for the LPP150-25-22/4 pump. The top panel shows Head (m) on the left y-axis (0 to 30) and Efficiency (%) on the right y-axis (0 to 100). The middle panel shows Efficiency (%) on the right y-axis (0 to 100). The bottom panel shows Power (kW) on the left y-axis (0 to 24). The x-axis represents Flow (m³/h) from 0 to 275. A shaded gray region indicates the operating range, bounded by a blue line at the top and a green line at the bottom. The blue line represents the head curve, starting at approximately 28 m at 0 m³/h and decreasing to about 24 m at 260 m³/h. The green line represents the efficiency curve, starting at approximately 12% at 0 m³/h and increasing to about 73% at 260 m³/h. The blue line represents the power curve, starting at approximately 12 kW at 0 m³/h and increasing to about 20 kW at 260 m³/h.

Flow (m³/h)	Head (m)	Efficiency (%)	Power (kW)
0	28	12	12
50	27	25	13
100	26	40	14
150	25	55	15
200	24	70	16
250	23	73	18
260	22	73	20



	Installation picture LPP150-25-22/4	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/10/26
Project Name		Client Name	Spaceport
Item NO		Client Addr.	Куйбышева 95 Б
		Contacts	
		Contact	

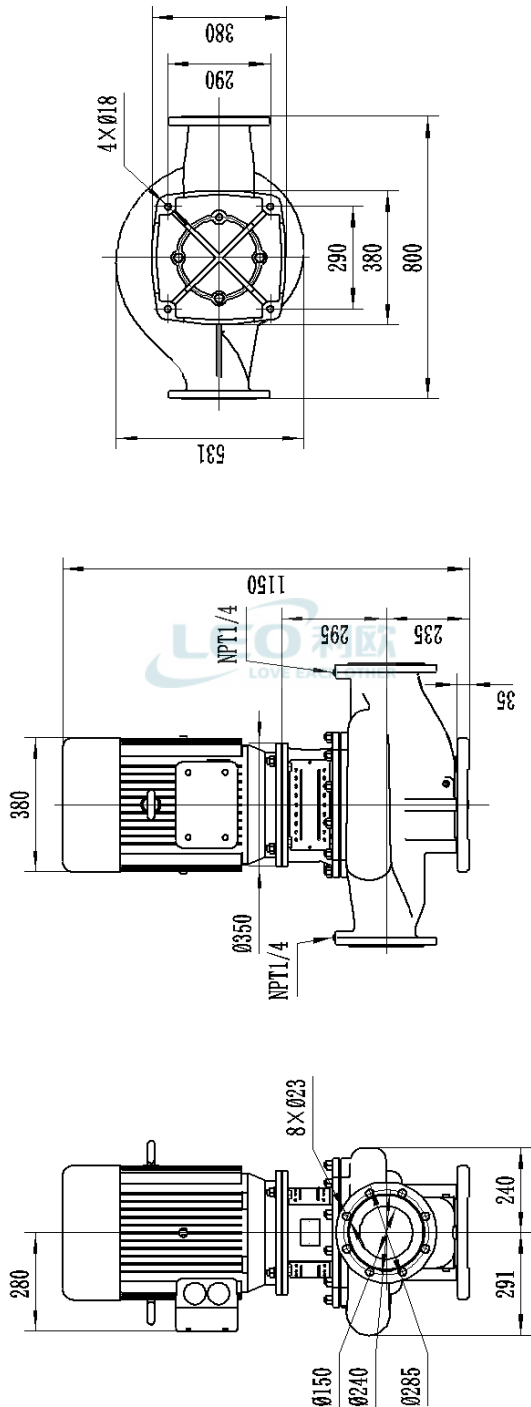

	Structure picture LPP150-25-22/4	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/10/26
Project Name		Client Name	Spaceport
		Client Addr.	Куйбышева 95 Б
Item NO		Contacts	
		Contact	

LPP



29	Hex nut	
28	Washer	
27	Motor	
26	Hex head bolt	
25	Clamp ring	45
24	Pump shaft	304/45
23	Key	304
22	Release valve	304
21	Hex nut	HPb59-1
20	Washer	
19	Hex head bolt	
18	Motor frame	HT200
17	Rivet	
16	Nameplate	
15	Guard plate	304
14	Screw	
13	Mechanical seal	SiC/C
12	Impeller	HT200
11	Washer	304
10	Spring washer	304
9	Hex nut	304
8	O-ring	NBR
7	Double-head stud A type	
6	Hexagonal socket head plug	
5	Pump body	HT200
4	Hexagonal socket head plug	
3	Baseplate	HT200
2	Spring washer	
1	Hex head bolt	
No.	Part	Material

	Physical picture LPP150-25-22/4	Manufacturer	LEO
		Address	China,Zhejiang,Wenling
		Contact	0576-89988888
		Date	2023/10/26
Project Name		Client Name	Spaceport
		Client Addr.	Куйбышева 95 Б
Item NO		Contacts	
		Contact	

