

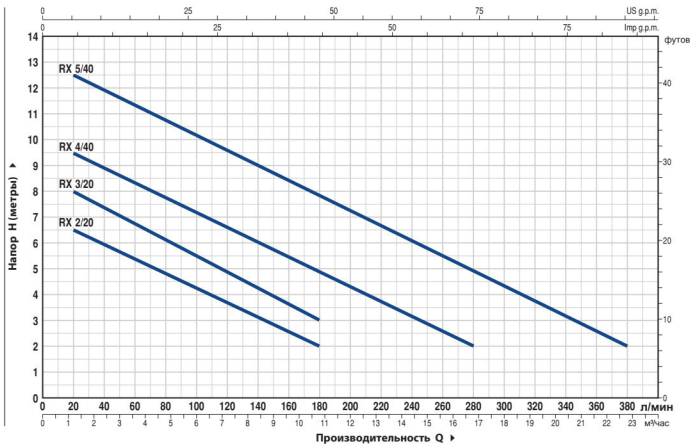





ТИП		МОЩНОСТЬ (P2)		Q																
Однофазный	Трёхфазный	кВт	лс		м³/час л/мин	0	1.2	2.4	3.6	4.8	6	7.2	8.4	9.6	10.8	13.2	16.8	20.4	22.8	
RXm 2/20 /GM	RX 2/20 /GM	0.37	0.50	Н метры	0	20	40	60	80	100	120	140	160	180	220	280	340	380		
RXm 3/20 /GM	RX 3/20 /GM	0.55	0.75		7	6.5	6	5.5	4.8	4.3	3.7	3	2.5	2						
RXm 4/40 /GM	RX 4/40 /GM	0.75	1		9	8	7.5	6.5	6	5.5	4.7	4.2	3.5	3						
RXm 5/40 /GM	RX 5/40 /GM	1.1	1.5		10	9.5	8.7	8.5	7.7	7	6.5	6	5.5	4.7	3.7	2				
					13	12.5	12	11.5	10.7	10	9.5	9	8.3	7.7	6.5	5	3	2		

РАЗМЕРЫ И ВЕС



Стандартная установка



ТИП		ПАТРУБОК DN	РАЗМЕР мм							ВЕС кг		
Однофазный	Трёхфазный		a	h	h1	d	регулируемая	e	p	q	1~	3~
RXm 2/20 /GM	RX 2/20 /GM	1¼"	147	290	278	25		350	350		6.1	6.1
RXm 3/20 /GM	RX 3/20 /GM			320	308						7.9	7.9
RXm 4/40 /GM	RX 4/40 /GM	1½"	220	430	400	50		500	500		13.0	12.2
RXm 5/40 /GM	RX 5/40 /GM										14.0	13.0